

TYPICAL AF 6  
CONSTRUCTION NOTES

DETAIL SD 10.01

Wolfinsteel P5 fitted into dust-free 5 X 20 sawcut, that has been primed with Bostik N49 Primer and pre-filled with Bostik Seal-N-Flex 1 urethane sealant.\*


25 clear of any adjacent edge. 15 - 20 below any existing flashing

Fix P 5 with Hilti nylon anchors at 150 centres close to bottom edge. Then overlaid membrane.


PE foam separation tape

\* When installed into floors fill saw-cut with BluRez Epimax 111 pourable epoxy or EpiMax 480 for sloping surfaces. On vertical surfaces EpiMax 575

DETAIL SD 10.02

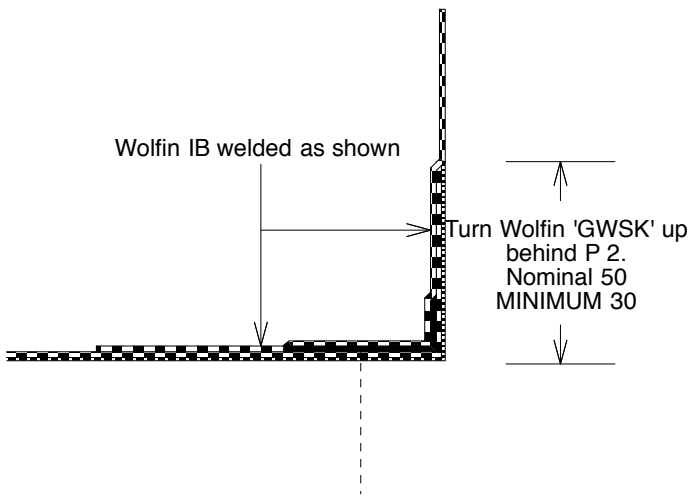

Wolfin 'GWSK' deck membrane laid first and carried min. 30mm up the vertical face. Plant the P 2 fixed @ 150 centres and then weld the upstand membrane over.

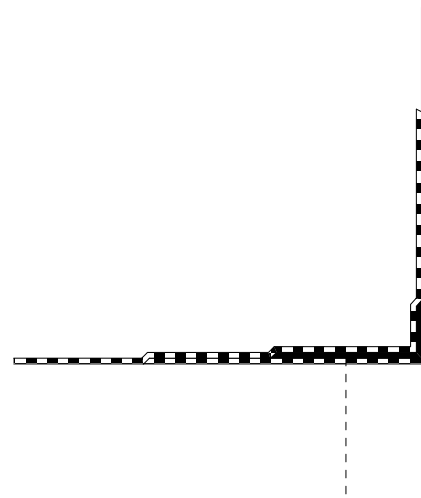

Wolfin IB. Lay the upstand skirt first, carried 80mm onto the deck. Plant the P2 on the skirt and then overlaid with the deck membrane.

TYPICAL WOLFINSTEEL P 2  
Layups for Wolfin 'GWSK' and loose laid IB shown

DETAIL SD 10.03

This drawing is intended to show basic principles and set minimum standards. Any variation in site conditions is to be referred to WMA for approval of the required detail. The thickness scale on this drawing is exaggerated for clarity.

COMMENTS / ASSOCIATED DRAWINGS

© WOLFEN MEMBRANES AUSTRALIA PTY LTD

Standard Guide Details

REV: JUNE 2013

Construction Notes  
AF 6, P 5 and P 2  
Details 10.01 to 10.03

Scale: 1: 2

Date: May 2011

Dwg No: SD - 10